
S918

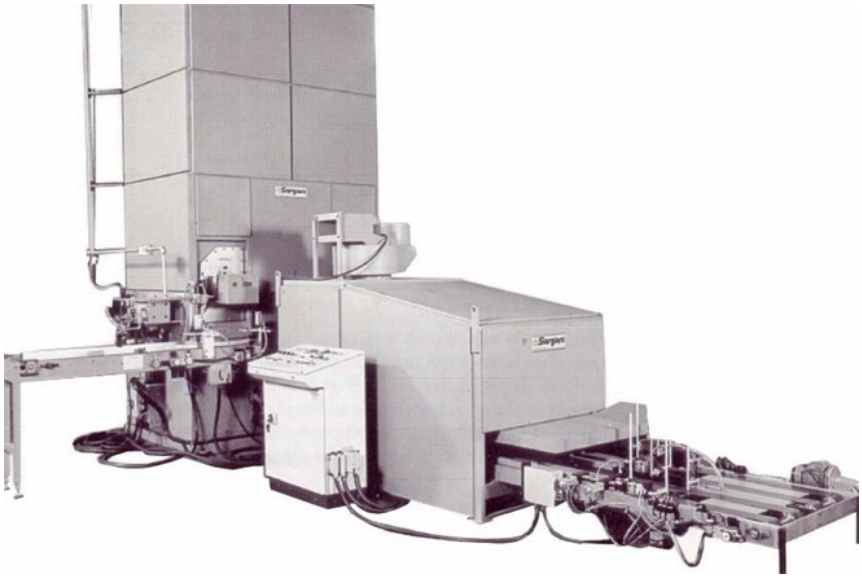

VERTICAL OVEN

Electrically welded steel frame. The machine is mainly composed by two elements: burning and cooling chamber. The former is provided with burning system which can be gas, gasoil or electricity working. The not air is blowed into the draying chamber by an antis park system. Ends transferred inside the drying chamber by a double chain are rotated of 360°. Times of insertion, accent, descent, wait and outlet are set according to the characteristics of the compound used. Electric and pneumatic controls are located far from heat sources.